
# VERSEIDAG

## Duraskin B1515

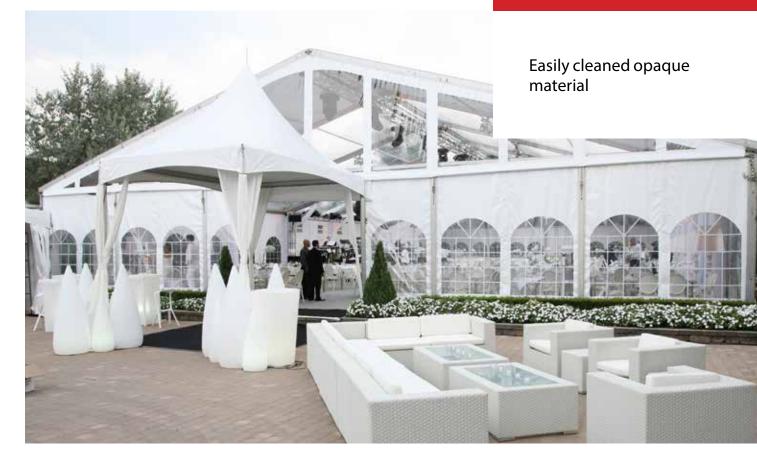


**Opaque White** 

B1515-289

### **Duraskin** B1515

### **Applications:**

Clear span tents, frame & pole tents

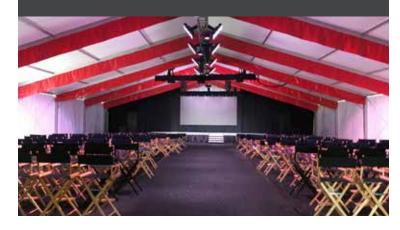

### Duraskin<sup>®</sup> technology

Special coating process ensures:

- Shorter cleaning time: to reduce time and money
- Longer lasting: looks new longer to increase revenues from more high-profile events

	Properties	Standards
Yarn	1100 PES HT	
Coating	PVC	
Finish	Acrylic	
Opacity	Opaque	
Weight	22.1 oz/sqyd	EN ISO 2286-2
Width	61/98.4/118.1 in	
Standard length	109.3 / 328 yds	
Tensile strength* (warp/weft)	310/290 lbs/in	ASTM D751, Cut strip
Tear strength* (warp/weft)	41/32 lbs	ASTM D751, Trapezoid
Adhesion*	14/14 lbs/in	ASTM D751
Temperature resistance	-31°F/+158°F	in static position, internal test
	Flame retardancy	
Rating	Method 2 / NFPA 701 — CAN/ULC-S109-14	
	Management systems	
Quality		ISO 9001
Environment		ISO 14001
Energy management		ISO 50001

Certifications, warranties, recycling



3 year warranty Photos: Wedding tent, Corporate event tent, Fiesta Tents

\* Confirm values with an external lab, as necessary.

The above technical data represents average values subject to a +/- 5% tolerance.

The buyer of our products is fully responsible for their application or their transformation concerning any possible third party. The buyer of our products is responsible for their implementation and installation according to the standards, workmanship and safety regulations in force in destination countries. For information on our contractual warranty, please refer to the relevant terms and conditions.

. The values quoted above represent results of tests performed in compliance with common design practices and are provided for information only to enable customers to make the best use of our products. Our products are subject to evolutions due to technical progress, we remain entitled to modify the characteristics of our products at any time. The buyer of our products is responsible for checking the validity of the above data.



Serge Ferrari North America 954.942.3600 marketing.us@sergeferrari.com sergeferrari.com/us

